

metro

acoustics

silent solutions

Metro Eco-Bord 9.5mm PET Hexagon Specifications

PHYSICAL PROPERTIES

- Dimensions: 48" X 96"
- Thickness: 9.5 mm
- Weight: 1500 grams/square meter, 44 oz/square yard
- Flame & Smoke: CAN/ULC-S102.2 , ASTM E84 Class A
- NRC: .30 (when applied directly to substrate)
- Edge Detail: Square

HOW TO SPECIFY

- Product name & code
- Dimensions
- Colour

MATERIALS

The hexagons are composed of 100% polyester fibre, 60% of which is recycled PET fiber, and contributes to LEED certification.

Available in 35 colours.

The felting and dyeing process that forms the material contributes to its unique texture but also to variations in texture and colour from panel to panel. Products will be provided within an acceptable range of variation.

*Custom shape and sizing available.

ADHESIVE

- Use heavy duty construction adhesive
- Self adhesive option available

Step 1


Apply non-solvent, heavy duty construction adhesive to the back of the panel. Approximately one 290 ml (10 fl oz) tube of construction adhesive required per 48" x 96" panel.

Step 2

Press hexagon onto the wall and hold until adhesive sets.

INSTALLATION

Installation method should be specified at the time of installation.

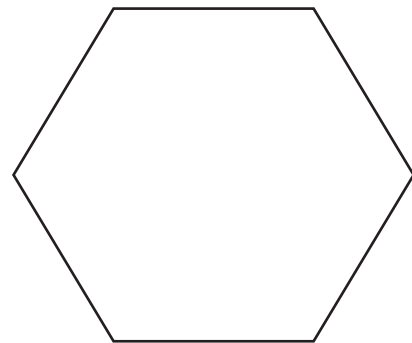

36 tiles - 10.25" X 10.25"

metro

acoustics

silent solutions

Metro Eco-Bord 9.5mm PET Hexagon Specifications

PRODUCT CARE

HANDLING & STORAGE

- Handle products with care so as to avoid folding the polyester felt, chipping its edges or indenting its faces.
- Store products in their original containers in a well-ventilated area until the intended application environment is ready for installation.
- Allow products to acclimatize to environmental conditions.
- Protect from moisture, heat, direct sunlight and the elements.

MAINTENANCE

- Lightly brush or gently vacuum to remove dust from polyester felt.
- Clean with warm water and mild, non-toxic soap to remove spills.
- Test solution on an inconspicuous spot before applying to more visible areas.
- Blot with a dry cloth after applying the solution to avoid saturating the material.
- Avoid applying too much pressure when cleaning the products.

DISINFECTING

- If there is a need for infection control, bleach can be used in accordance with CDC Cleaning and Disinfection instructions.
- The solution ratio should be 5 tablespoons of bleach to 1 Gallon of water or 4 teaspoons of bleach per quart of water.
- Spray apply the solution as a mist and then wipe off the surface moisture to help spread the bleach solution.
- Always try these methods in an inconspicuous place on the product prior to trying on a visible area.

WARRANTY

Metro Wallcoverings warrants the construction and finish of all our products to be free from defects in material and workmanship for a period of 1 year from the date of purchase.